
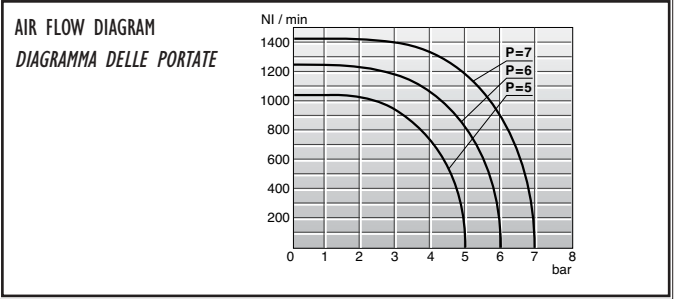


AIR FLOW DIAGRAM / DIAGRAMMA DELLE PORTATE

ONLY 5/3 VALVE MID POSITION CLOSED
SOLO VALVOLA 5/3 CENTRI CHIUSI



TECHNICAL FEATURES

Standard tensions 24 V DC; 24 V AC (50/60 Hz)
Duty cycle 100% ED
Power at 20 °C 1 Watt DC; 3 VA AC
Operating temperature range..... -30 °C ÷ +50 °C
Insulation..... Class F
Materials Glass reinforced Polyamide 6.6

CARATTERISTICHE TECNICHE

Tensioni standard 24 V DC; 24 V AC (50/60 Hz)
Funzionamento..... 100% ED
Potenza assorbita a 20 °C 1 Watt in DC; 3 VA in AC
Limiti di temperatura ambiente -30 °C ÷ +50 °C
Bobina Bobina completa classe F
Materiali Poliammide 6.6 caricata vetro

SOLENOID OPERATORS / ELETTROPILOTI

SOLENOID OPERATORS / ELETTROPILOTI **CHF24.C**

Code ordination Codice ordinazione	Voltage Tensione
CHF24DC	24 V DC
CHF24AC	24 V 50/60Hz AC

OVERALL DIMENSIONS / DIMENSIONI DI INGOMBRO

Number valve stations / Numero posti valvola

	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A	68	84,5	99,4	115,5	103,5	147	162	178	193	209	224	240,5	255,5	271,5	286,5
I	56	72,5	87,5	103,5	118,5	135	150	166	181	197	212	228,5	243,5	259,5	274,5

VALVOLE ED ELETTROVALVOLE

